

MULAG

Innovative Technologies for Roadside Maintenance Equipment



Scrub cutting head

GMK 1200

Scrub cutting head GMK 1200

All advantages at a glance


The Scrub cutting head GMK 1200 is suitable for cutting grass and scrub up to 60 mm. For this purpose the GMK 1200 is equipped with an adjustable protection.

- **Belt drive by axial piston motor**
- **Ball valve to invert the direction of rotation of the cutter shaft**
- **Protection against flying objects through double rubber apron**
- **High punching force**
- **The cutters can evade completely (rotate through the shaft)**
- **Uniform wear of the cutters**
- **Different cutting edge geometries in both rotating directions**



GMK 1200 with closed protection for use in grass

HS

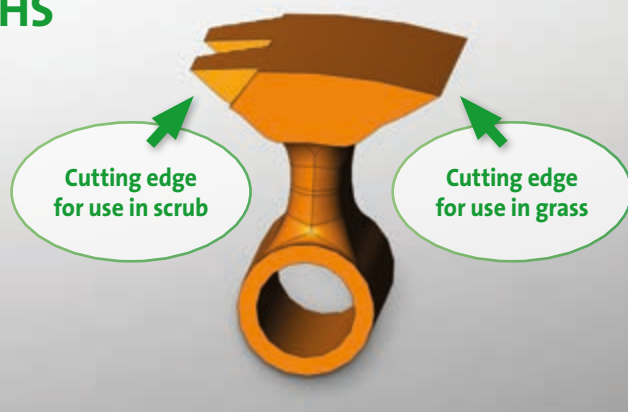


Schematic illustration of the HS cutter

Scrub cutting head GMK 1200

Technical Data

Working width	1200 mm
Total width	1520 mm
Rotating speed of flail shaft	2300 rpm
Cutting thickness	60 mm
Weight	about 345 kg
Power consumption	max. 35 kW / 48 kW
Cutters	HS (20 pieces)

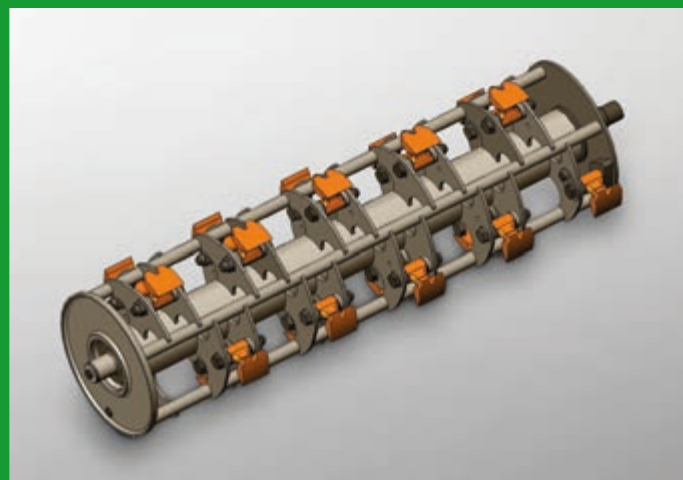

Schematic illustration of the GMK 1200 cutting shaft

Distributor

Manufacturer

MULAG

MULAG Fahrzeugwerk
Heinz Wössner GmbH u. Co. KG
Gewerbestrasse 8
77728 Oppenau
Germany

Tel. +49 7804 913-0

Fax +49 7804 913-163

E-Mail info@mulag.com

Web www.mulag.com

