

MULAG

Innovative Technologies for Roadside Maintenance



Additional Mowing Disc

ZMS 400

Additional Mowing Disc ZMS 400

All advantages at a glance!

The additional mowing disc ZMS 400 is ideal **for mowing the immediate area of crash barriers** with reduced post spacing (e.g. Super-Rail).

It is attached to the verge mowing head RMK 1200 or automatic sensor mowing head TMK 1200 and folded out for use when required.

For combined use from both sides of the crash barrier, another additional mowing disc can optionally be attached to the mowing head of a combination boom.



- ✓ Hydraulic drive
- ✓ Autom. evasive movement in case of obstacles
- ✓ Can be switched on and off via control panel
- ✓ Quick assembly and disassembly

Technical Data

Working width	400 mm
Construction height mowing disc	260 mm
Cutting height	65 mm
Rotation speed	approx. 3600 rpm
Weight	approx. 60 kg
Permissible power consumption	20 kW


Distributor



Use even in confined spaces



Folded-in additional mowing disc when using the verge mowing head

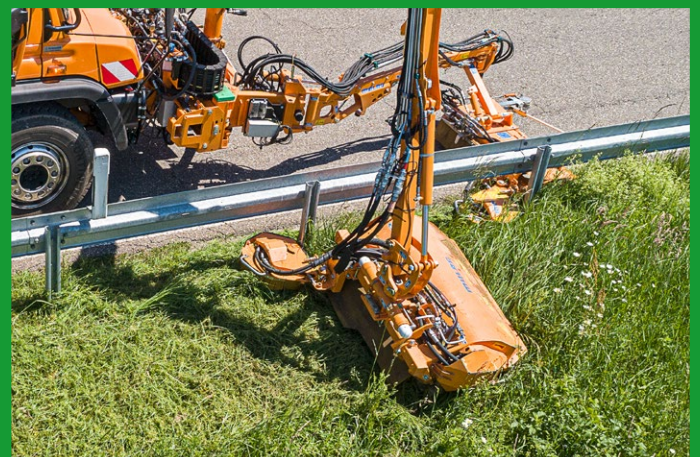

Combination use of the ZMS 400 additional mowing disc on the MKM 700

Manufacturer

MULAG

MULAG Fahrzeugwerk
Heinz Wössner GmbH u. Co. KG
Gewerbestrasse 8
77728 Oppenau
Germany

Tel. +49 7804 913-0

Fax +49 7804 913-163

E-mail info@mulag.com

Web www.mulag.com

