

MULAG

Innovative Technologies for Roadside Maintenance



Rear-Mounted Mower

MHU 900

Unimog

Rear-mounted mower MHU 900

Technical Data

Reach	right up to 9.5 m / left up to 9.3 m
Telescopic arm	0.8 m (Main boom), 1,2 m (Boom 3)
Passing over height	3.3 m
Lateral shift	1.2 m
Rotation range	224° Right-/Left-hand side
Type of fitting	Platform subframe
Drive	- Vehicle power hydraulic system - Live engine PTO (N05)
Steuerung	electro-hydraulic with optional proportional automatic power arm relief control m tronic
Safety-Stop	Electrical operation of working attachment with safety stop within 4 sec
Tilt/swivel device	Tilting angle 50° each (left and right)

Working attachments*

Flail mowing head MK 1200 plus

Working width	1200 mm
Cut thickness	max. 20 mm

Free zone cutter FSG 2000

Working width	2000 mm
Cut thickness	150 mm

* further working attachments on request




Rear-mounted mower MHU 800 in transport position.



Combination operation - both mowing heads in the operator's field of vision



Tilt/swivel device for swiveling and tilting the working attachment

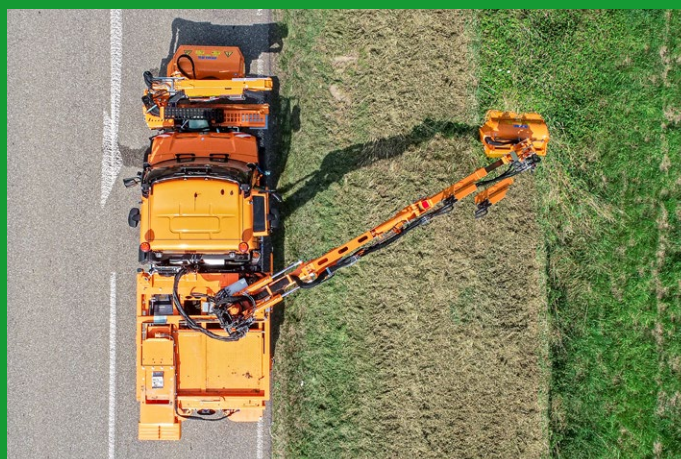

A large portal and enormous range characterise the MHU 900

Distributor

Manufacturer

MULAG

MULAG Fahrzeugwerk
Heinz Wössner GmbH u. Co. KG
Gewerbestrasse 8
77728 Oppenau
Germany

Tel. +49 7804 913-0

Fax +49 7804 913-163

E-mail info@mulag.com

Web www.mulag.com



All reach values measure from the centre of the vehicle (including mowing head width of 1.2 m)